

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
11 March 2004 (11.03.2004)


PCT

(10) International Publication Number  
**WO 2004/021268 A1**

- (51) International Patent Classification<sup>7</sup>: **G06K 15/10**, B41J 2/05, 2/14
- (21) International Application Number: PCT/GB2003/003767
- (22) International Filing Date: 1 September 2003 (01.09.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 0220227.3 30 August 2002 (30.08.2002) GB *30 Feb 05*
- (71) Applicant (for all designated States except US): **XAAR TECHNOLOGY LIMITED** [GB/GB]; Science Park, Cambridge CB4 0XR (GB).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **TEMPLE, Stephen** [GB/GB]; 66 Girton Road, Cambridge CB3 0LN (GB).
- (74) Agents: **GARRATT, Peter, Douglas et al.**; Mathys & Squire, 100 Gray's Inn Road, London WC1X 8AL (GB).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published: — with international search report

[Continued on next page]

(54) Title: INK JET PRINTING USING ELONGATED PIXELS

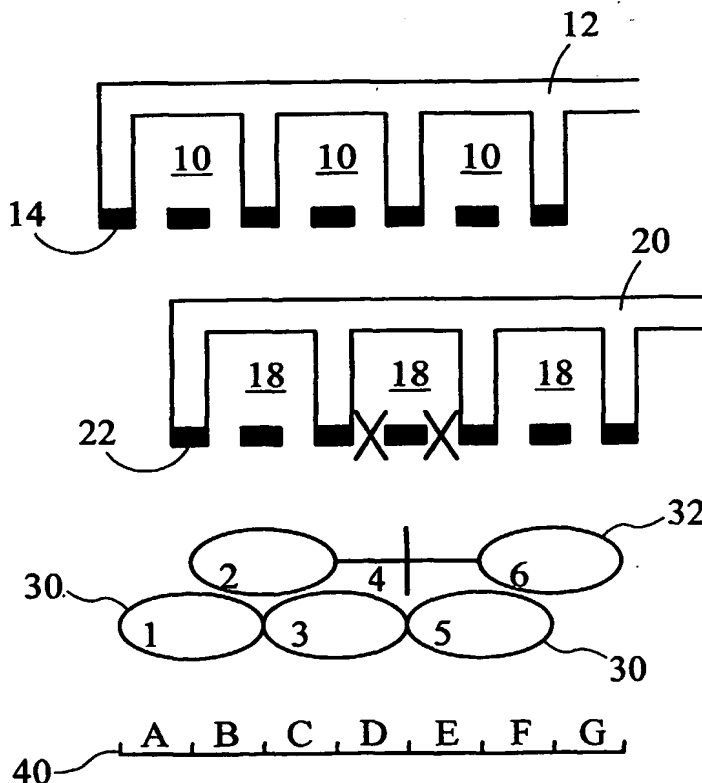

(57) Abstract: An ink jet or other printer serves to print for each row of input pixels, two superimposed rows of contiguous "super pixels", each print pixel being capable of receiving print contributions from N super pixels. The super pixels are twice the width of the input pixels and one row of super pixels is offset by half a super pixel width from the next row of super pixels. Redundancy is thus provided against the loss of a print element. The effects of smoothing of an image are reduced by edge enhancement processes.

BEST AVAILABLE COPY

WO 2004/021268 A1



---

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

## INK JET PRINTING USING ELONGATED PIXELS

The present invention relates to printing and, in a particularly important example, to ink jet printheads.

There is a demand for digital printers having a printhead that extends across the full width of the printed page offering both high throughput and high  
5 print quality.

In an ink jet printer of this character, having the necessarily large number of closely spaced ink chambers and nozzles, there will always be a risk of failure of one or more nozzles, whether as a consequence of a manufacturing error or through nozzle blockage or other failures in use.

10 It will be possible to detect and discard manufactured printheads having even a single failed nozzle. However, because of the very large number of nozzles in each printhead, and because of the sophistication of the manufacturing techniques, such quality control measures would likely lead to an uneconomic manufacturing yield.

15 In use of the printhead, failure of even a single nozzle can lead to perceptible print artefacts, because of the spatial correlation of the artefact as the printed substrate is indexed past the printhead.

Accordingly, it is an object of the present invention to provide improved methods of printing and improved printheads that are able to conceal artefacts  
20 arising from nozzle failures or other departures from standard print performance across a print row.

Accordingly, the present invention consists in one aspect in a method of printing parallel rows of contiguous pixels on a substrate indexed in a direction orthogonal to the rows, comprising the steps of printing for each row  
25 of pixels N superimposed rows of contiguous super pixels, each print pixel being capable of receiving print contributions from N super pixels, and each super-pixel preferably being elongated in the row direction with an aspect ratio of N:1.

Advantageously, each of the N superimposed rows of contiguous super  
30 pixels is offset in the row direction with respect to each of the other

superimposed rows, with the distance of said offset preferably being  $1/N$  of the dimension of the super pixel in the row direction.

Preferably, print data is received in the form of an array of print data pixels and wherein the value of each super pixel is derived as a weighted sum of preferably at least three corresponding data pixels with each super pixel preferably symmetrically disposed with respect to print data pixels.

Advantageously, at least one of the weighting coefficients applied to the corresponding data pixels in said weighted sum is negative.

In a preferred form of the invention, the printability of each super-pixel is measured, and the contribution to those pixels covered by that super-pixel is transferred wholly or in part to one or more other super-pixels from which those pixels are capable of receiving print contributions in accordance with any measured deviation in printability of that super pixel.

Suitably, an error in printability is measured for each super pixel and wherein the determination of the value of each super pixel includes a function of measured error in printability, with that function being preferably polynomial and including terms to at least the third power.

According to a further aspect, the present invention consists in an ink jet printer having a plurality of ink chambers each provided with a nozzle arrangement, the plurality of ink chambers being arranged so as to print on a substrate a row of contiguous print elements, the nozzle arrangement of each ink chamber being such that the print element associated with that ink chamber is elongated in the row direction with an aspect ratio of at least 2:1.

Advantageously, at least two sets of ink chambers are provided, each set being arranged so as to print a row of contiguous print elements, the rows of contiguous print elements printed by the respective sets of ink chambers being superimposed.

Suitably, the print elements of one set of ink chambers are offset in the row direction with respect to the print elements of another set of ink chambers with the offset being preferably the reciprocal of the aspect ratio.

In still a further aspect, the present invention consists in a method of printing a representation on a print medium of an array of print data pixels comprising the steps of distributing print data from said array of print data pixels over an array of super pixels in a distribution function such that each

super pixel receives a print data contribution from at least two print data pixels and each print data pixel contributes print data to at least two super pixels; and forming print pixels on the medium such that each print pixel receives print contribution from at least two super pixels.

5 Preferably, the at least two super pixels from which a print pixel receives print contribution, receive print data contributions from different combinations of print data pixels.

Advantageously, each super pixel receives a print data contribution from at least three print data pixels with the print data contribution preferably  
10 varying in sign between said print data pixels.

Suitably, the method further comprises the step of measuring the print efficiency of each super pixel, with said distribution function preferably including the measured print efficiency.

In a preferred form of the invention, the step of forming print pixels on  
15 the medium such that each print pixel receives print contribution from at least two super pixels comprises the steps at each print pixel of depositing ink in an amount determined by one of the super pixels from which that print pixel receives print contribution and, whilst that deposited ink remains fluid, depositing ink in an amount determined by an other of the super pixels from  
20 which that print pixel receives print contribution.

In yet a further aspect, the present invention consists in a printer comprising an input port adapted to receive an array of print data pixels; a print arrangement for forming overlapping super pixels on a print medium and a print processor adapted to distribute print data from said array of print data  
25 pixels over the super pixels in a distribution function such that each super pixel receives a print data contribution from at least two print data pixels and each print data pixel contributes print data to at least two super pixels.

The present invention will now be described by way of example with reference to accompanying drawings in which:-

Figure 1 is a schematic view of an ink jet printhead according to the prior art;

Figure 2 is an end view of an ink jet printer according to one embodiment of the present invention, with a nozzle plate removed for clarity;

5 Figure 3 is sectional side view of an ink jet printer shown in Figure 2;

Figure 4 is a perspective view of an ink jet printer according to another embodiment of the present invention, with parts removed for clarity;

Figure 5 is schematic view (similar in diagrammatic form to Figure 1) of an ink jet printhead according an embodiment of the present invention;

10 Figures 6 and 7 are diagrams illustrating the alignment of input data pixels, super pixels and pixels printed on a substrate; and

Figure 8 is a diagram illustrating the performance of an ink jet printer according to an embodiment of the present invention.

Referring initially to Figure 1, an ink jet printhead has a first array of ink  
15 chambers 10 defined by a piezoelectric wall structure 12. A nozzle plate 14 secured to the wall structure 12 defines a nozzle for each ink chamber 10. This first array of ink chambers is shown as depositing ink droplets 16 on an appropriate substrate.

20 Ink jet printheads of this general form are described for example in EP-A-0 277 703 and EP-A-0 278 590.

To increase the number of ink droplets that can be deposited for a unit length of the print row, it has been previously proposed to provide a second array of ink chambers 18 similarly defined by a piezoelectric wall structure 20 and having a nozzle plate 22 defining one nozzle per ink chamber 18. This  
25 second array of ink chambers 18 is shown as depositing ink droplets 24 on the substrate. In this way, it is possible effectively to double the print resolution as compared with the "intrinsic" resolution defined by the nozzle spacing in a single array of ink chambers.

Each ink chamber 10 may be formed as an elongate channel, which is  
30 collinear with and shares the same ink supply ports, as an elongate channel forming a corresponding one of the ink chambers 18. The parallel array of ink channels is then angled to create the offset in the two sets of nozzles.

If one chamber or nozzle should fail (as marked schematically at X), there will be an unprintable pixel in the print row. Even though the number of

ink drops per unit length of the print row may be high (perhaps 360 dpi), a single unprintable pixel may still produce a visually unacceptable artefact because of the spatial correlation of that artefact as the print substrate is indexed relative to the printhead.

5 Referring now to Figures 2 and 3, a set of print chambers 10 is defined by a piezoelectric wall structure 12. In this case, the nozzle plate 14 serves to define two nozzles per ink chamber 10. Each of the two nozzles is of the same or similar dimensions as the single nozzle in the Figure 1 arrangement and the two nozzles of each chamber are arranged to form a single ink droplet  
10 30 on the substrate of around double the volume of the ink drop 16 in the Figure 1 arrangement. Each drop is elongated in the direction of the print row, having an aspect ratio of 2:1 and each drop has a length such that they are contiguous across the print row.

The chamber structure may be modified such that it provides narrower  
15 wall structures 12 and a wider print chamber 10 to allow space for the two nozzles. The walls may be as thin as 25  $\mu\text{m}$  without significant loss of activity.

The print head of Figures 2 and 3 is of a structure commonly known as an "end shooter". As is known, for example from EP-A-0 277 703 incorporated herein by reference, channels 10 are formed in a block 32 of piezoelectric  
20 material polarised in the direction of arrow 35. The application of a electric field across electrodes 34 formed on opposite surfaces of a side wall 36 causes the piezoelectric material of the side wall to deflect in shear mode, thereby causing the ejection of an ink droplet from a nozzle associated with the channel. The position of the nozzles within the chamber is depicted  
25 schematically and may or may not be provided entirely within the channel. It is often possible for a portion of the nozzle to overlap the walls without a significant change in ejection characteristics.

The channel terminates with a nozzle plate 14, within which the nozzles are formed – as depicted in Figure 3 which is a sectional view taken along the  
30 longitudinal axis of the channel.

The print head of Figure 4 is a structure commonly known as a "side shooter". Nozzles 38 are provided within a cover plate 37 and are located at a point which lies between the ends of the channels. There are two nozzles for each channel 10. Ink ports (not shown) are provided at either end of the

channel to allow circulation of ink through the ejection chamber. A print head of this type, but with just a single nozzle is described in WO 91/17051. The nozzles are shown schematically and are not to scale.

As illustrated schematically in Figure 5 (which is of the same diagrammatic form as Figure 1 and which depicts the nozzle and channel arrangements of either the embodiment of Figures 2 and 3 or the embodiment of Figure 4), a second set of ink chambers is provided and is again defined by a piezoelectric structure 20 with a nozzle plate or cover plate 22 defining two nozzles per ink chamber 18. These two nozzles combine to form ink drops 32 which similarly have a 2:1 aspect ratio and form a contiguous row.

The second set of ink chambers 18 may be located within a separate print head to that containing the first set of ink chambers 10 or may be part of the same print head such as described in WO 00/29217.

The ink drops 30 from the first array of ink chambers are offset along the print row with respect to the ink drops 32 of the second set of the chambers 18 by half the pitch of the ink chambers. With this arrangement, if there is a failure of a single chamber such as that shown schematically at X, no pixel remains unprintable.

It is convenient to regard the elongated ink drops 30 and 32 as printing "super-pixels", each pixel printed on the substrate receiving contributions from up to two super-pixels. The printed pixel structure is depicted in Figure 5 as units A, B, C, D of line 40. In the control and drive arrangement for the printhead, provision is made to distribute the desired print density for a particular pixel between the two super-pixels which contribute to that pixel. In a typical arrangement, the desired print density for a pixel - established on a suitable greyscale - would be distributed 50% each to the two corresponding super-pixels. In the event that a failure of an ink chamber (or the associated nozzles) is detected, the distribution of print density can be switched so that each of the two pixels covered by the now missing super-pixel receive 100% of the desired print density from the other super-pixel which covers that pixel. This compensation for a missing super-pixel through variation in the greyscale of neighbouring super-pixels will effect neighbouring pixels. Such effects will generally be far less noticeable than an unprintable pixel. In an improvement, steps are taken to add noise (either by subtracting or adding grey levels) to



distribute the effects of the missing lines over 1 or more neighbouring super-pixels and reduce the spatial coherence of the artefact.

Although the row of super-pixels 13 (being the odd-numbered super-pixels 1, 3, 5...) are shown in Figure 5 to be transversely separated from the row of super-pixels 32 (being the even-numbered super-pixels 2, 4, 6...), this is for drawing convenience only. The two rows of super-pixels are effectively super-imposed.

One approach to deriving the greyscale levels for the super-pixels from the greyscale pixel values received as input print data is as follows.

The greyscale value of each super-pixel is set as one quarter of the sum of the greyscale values for the two pixels covered by the super-pixels, thus:-

$$S_1 = (P_A + P_B)/4 \qquad S_2 = (P_B + P_C)/4$$

This processing will serve as a low-pass spatial filter of the print image. In regions where this spatial filtering may have a noticeable effect on the image, as for example an edge, it will be possible to vary the algorithm or to pre-emphasize the edge so that the filtering has less noticeable effect.

In one embodiment of this invention, a print test is conducted to measure the print rate at each super-pixel for a nominal full black print density. This information is then employed in a calibration process which determines during future use of the printhead how the super-pixel greyscale values  $S_1, S_2, \dots$  are derived from the input pixel greyscale values  $P_A, P_B, \dots$ .

Thus in a case where the greyscale value of a pixel would be shared 50%-50% between two super-pixels, prior knowledge that one super-pixel is being printed less effectively than another may cause an alternative division to be made. In the case where one super-pixel is not being printed at all, a division 0%-100% can be made. If there is simply a reduction in the printed weight of a super-pixel by reason of some manufacturing variance, a distribution such as 50%; 75% may be suitable.

A further approach to derive greyscale levels for the super pixels from the greyscale values received as input print data whilst correcting for both errors within the print heads and enhancing the edges is as follows:

A full black reference image is printed and for each super pixel the optical density is measured. An average optical density is calculated and the error for each super pixel calculated using the equation:

5 
$$E_p = 1 - (OD_p / OD_{average})$$

Where  $E_p$  is the error;  $OD_p$  is the measured optical density of super pixel  $p$  and  $OD_{average}$  is the calculated average optical density across the row of super pixels.

10 A distributed error is calculated from the equation:

$$DE_p = 2 E_p^n - E_{p+1}^n - E_{p-1}^n$$

15 where  $n$  is a value greater than 1 and chosen such that only gross errors are distributed through this term. A value of 4 is appropriate.

The image data is input as a value between 0 (no image data) and 1, full black for each print data pixel. The grey level for each print data pixel is denoted by the term  $g$ .

20 Super pixels are defined as shown diagrammatically in Figure 6. It will be seen that each print data pixel (represented as the input grey level  $g_p$ ) has symmetrically aligned with it a super pixel (represented as a calculated base grey level  $G_p$ ). Each pixel has an aspect ratio of 2:1, extending in the row direction a distance twice the dimension of the print data pixel. The super pixels are arranged in two rows with the super pixels aligned with even print data pixels in one row and the super pixels aligned with odd print data pixels in another.

It should be noted that an alternative arrangement can be identified (as shown in Figure 7) in which the array of super pixels is not symmetrically aligned with respect to the array of input data pixels.

30 The base level  $G$  for each super pixel is then calculated from the equation:

$$G_p = (g_p + (g_{p+1} + g_{p-1})/2) / 2$$

It has been mentioned above that an effect of distributing the input print data values over super pixels may be to soften the printed representation in the row direction. If appropriate, edges in the print data may be "pre-enhanced" so as to reduce the perceived effect of this softening. In the present example, this enhancement is conveniently effected by defining:

$$\text{Edge}_p = \text{EHF} * (2g_p - g_{p+1} - g_{p-1})$$

EHF is an arbitrary value selected on the edge enhancement required; a typical value being around 0.5.

The error in the grey value is at each super pixel (arising from the measured error and the distribution of that error over neighbouring super pixels) is then calculated from the equation:

$$G^{\text{Error}}_p = G_p * (E_p - \text{DE}_p * \text{EECF})$$

where EECF is an arbitrary edge error correction factor; a typical value being around 0.5.

The print data for each super pixel is subsequently calculated from the equation:

$$\text{Print} = G_p/2 + G^{\text{Error}}_p/2 + \text{Edge}_p$$

The calculated Print data is sent to the ejection channels to print the required image.

As illustrated schematically in Figure 6, the p'th printed pixel P on the substrate receives print contribution from two super pixels. In the arrangement where the two rows of pixels are printed in a single pass using two rows of ejection chambers, the ink from the two super pixels combines to produce an optical density determined by the sum of the print values for those super pixels.

This described arrangement has a number of advantageous features. If a particular ejection chamber is inoperable (so that the measured error  $E_p = 1$ ), the effect of the error distribution is to increase correspondingly the

grey level of those super pixels in the other row that overlap with the "failed" super pixel. There is therefore avoided the highly visible artefact of a straight line of unprintable pixels. This is illustrated diagrammatically in Figure 8.

5 The softening that would otherwise accompany such redundancy in the print capability is reduced by an edge enhancement process, ingeniously implemented by adding negative terms to the weighted sum of input data pixels from which the print values for the super pixels are calculated.

10 Less gross errors detected by the measurement process are of course also compensated. The use of both linear and polynomial terms to provide for this compensation of measured super pixel "printability" is of course only one of a number of alternative approaches. A gross error (typically arising from a failing ejection chamber) might be detected by thresholding the measured error and substituting an alternative error distribution function, if that threshold is exceeded.

15 It will of course be understood that the calculations described above represent only one example of a technique for distributing input print values over super pixels. In certain applications, the step of measuring the printability of super pixels may be omitted. In other applications, non-algebraic techniques may be employed. Also, the distribution may be caused to vary with the input print data, if thought appropriate.

20 In other alternative arrangements, a number of super-pixels greater than two may contribute to each pixel. Thus, an arrangement having three arrays of print chambers, with each super-pixel covering three pixels and with each pixel receiving print contributions from three super-pixels, can also be employed. This arrangement would be expected to increase the resilience to super-pixel failures at the price of increased spatial filtering. In this case, with  $N = 3$  (rather than  $N = 2$ , as in the previously described embodiments), the offset between rows of super pixels can be  $1/N$  of the dimension of the super pixel in that direction. In other arrangements, there may be no offset between superimposed rows of sub pixels.

30 Experiments have shown that with piezoelectric operated ink jet print heads, it is possible to double the number of nozzles in an ink channel with only a modest increase in the actuation voltage required. If necessary, the

nozzles formed in the applied nozzle plate may overhang the piezoelectric wall structure to a certain degree without dramatically impairing the operation. The skilled man will recognize that there are many alternative techniques for printing an elongate super-pixel having an aspect ratio of 2:1, 3:1 or greater.

5 In certain applications of the present invention, super pixels may have an aspect ratio of 1:1.

In the description of preferred embodiments, the example has been taken of an ink jet printer with N rows of ejection chambers extending (or scanned) across the print medium, with the medium indexed in a direction  
10 orthogonal to the row direction after each pass. In an alternative, the super pixels from one pass are superimposed with super pixels from another pass. Care should be taken that N super pixels contribute to each print pixel; this can be achieved - for example by ensuring that all N super pixels are printed whilst the ink remains wet or (in the case of curable inks) un-cured.

15 Concepts here described will find application in other print arrangements. In particular, the method of printing a representation on a print medium of an array of print data pixels comprising the steps of distributing print data from said array of print data pixels over an array of super pixels in a distribution function such that each super pixel receives a print data  
20 contribution from at least two print data pixels and each print data pixel contributes print data to at least two super pixels; and forming print pixels on the medium such that each print pixel receives print contribution from at least two super pixels, will find useful application in arrangements other than ink jet printing and in arrangements other than a one dimensional printhead indexed  
25 across a print medium.

**CLAIMS**

1. A method of printing parallel rows of contiguous pixels on a substrate indexed in a direction orthogonal to the rows, comprising the steps of printing for each row of pixels, N superimposed rows of contiguous super pixels, each print pixel being capable of receiving print contributions from N super pixels.
2. A method according to Claim 1, wherein each super-pixel is elongated in the row direction with an aspect ratio of N:1.
3. A method according to Claim 1 or Claim 2, wherein each of the N superimposed rows of contiguous super pixels is offset in the row direction with respect to each of the other superimposed rows.
4. A method according to Claim 3, wherein the distance of said offset is  $1/N$  of the dimension of the super pixel in the row direction.
5. A method according to any one of the preceding claims, wherein  $N = 2$  or  $3$ .
6. A method according to any one of the preceding claims, wherein print data is received in the form of an array of print data pixels and wherein the value of each super pixel is derived as a weighted sum of corresponding data pixels.
7. A method according to Claim 6, in wherein each super pixel is symmetrically disposed with respect to print data pixels.
8. A method according to Claim 6 or Claim 7, in which the value of each super pixel is derived as a weighted sum of at least three corresponding data pixels.

9. A method according to any one of Claims 6 to 8, in which at least one of the weighting coefficients applied to the corresponding data pixels in said weighted sum is negative.
10. A method according to any one of Claims 6 to 9, in which every super pixel is derived as a weighted sum of different corresponding data pixels.
11. A method according to any one of the preceding claims, wherein the printability of each super-pixel is measured, and the contribution to those pixels covered by that super-pixel is transferred wholly or in part to one or more other super-pixels from which those pixels are capable of receiving print contributions in accordance with any measured deviation in printability of that super pixel.
12. A method according to Claim 11, wherein an error in printability is measured for each super pixel and wherein the determination of the value of each super pixel includes a function of measured error in printability.
13. A method according to Claim 12, in which said function is polynomial.
14. A method according to Claim 13, in which said polynomial function includes terms to at least the third power.
15. A method according to any one of the preceding claims in which the N superimposed rows of super pixels are printed in a single pass.
16. A method according to any one of the preceding claims, wherein the desired print density for each print pixel is distributed amongst those super-pixels from which the pixel is capable of receiving contributions.
17. A method according to Claim 16, wherein said desired print density is greater than that achievable by a single super pixel.


18. A method according to Claim 16 or Claim 17, wherein said distribution serves to compensate for measured differences in the print weight between super-pixels in each row of super-pixels.
19. A method according to Claim 16, wherein the print weight of each contributing super pixel is between 0% and 100% of said desired print density.
20. A method according to any one of the preceding claims in which each super pixel is printed as a plurality of ink droplets from an ink jet printer.
21. An ink jet printer having a plurality of ink chambers each provided with a nozzle arrangement, the plurality of ink chambers being arranged so as to print on a substrate a row of contiguous print elements, the nozzle arrangement of each ink chamber being such that the print element associated with that ink chamber is elongated in the row direction with an aspect ratio of at least 2:1.
22. An ink jet printer according to Claim 21, wherein at least two sets of ink chambers are provided, each set being arranged so as to print a row of contiguous print elements, the rows of contiguous print elements printed by the respective sets of ink chambers being superimposed.
23. An ink jet printer according to Claim 21 or Claim 22, wherein the print elements of one set of ink chambers is offset in the row direction with respect to the print elements of another set of ink chambers.
24. An ink jet printer according to Claim 23, wherein the offset is the reciprocal of the aspect ratio.




25. A method of printing a representation on a print medium of an array of print data pixels comprising the steps of distributing print data from said array of print data pixels over an array of super pixels in a distribution function such that each super pixel receives a print data contribution from at least two print data pixels and each print data pixel contributes print data to at least two super pixels; and forming print pixels on the medium such that each print pixel receives print contribution from at least two super pixels.
26. A method according to Claim 25, wherein each super pixel receives a print data contribution from at least three print data pixels.
27. A method according to Claim 26, wherein the print data contribution varies in sign between said print data pixels.
28. A method according to any one of Claims 25 to 27, wherein the at least two super pixels from which a print pixel receives print contribution, receive print data contributions from different combinations of print data pixels.
29. A method according to any one of Claims 25 to 28, further comprising the step of measuring the print efficiency of each super pixel.
30. A method according to Claim 29, wherein said distribution function includes the measured print efficiency.
31. A method according to any one of Claims 25 to 30, wherein the step of forming print pixels on the medium such that each print pixel receives print contribution from at least two super pixels comprises the steps at each print pixel of depositing ink in an amount determined by one of the super pixels from which that print pixel receives print contribution and, whilst that deposited ink remains fluid, depositing ink in an amount determined by an other of the super pixels from which that print pixel receives print contribution.

32. A method according to Claim 31, wherein the ink is deposited by ink jet printing.
33. A printer comprising an input port adapted to receive an array of print data pixels; a print arrangement for forming overlapping super pixels on a print medium and a print processor adapted to distribute print data from said array of print data pixels over the super pixels in a distribution function such that each super pixel receives a print data contribution from at least two print data pixels and each print data pixel contributes print data to at least two super pixels.
34. A printer according to Claim 33, wherein each super pixel receives a print data contribution from at least three print data pixels.
35. A printer according to Claim 34, wherein the print data contribution varies in sign between said print data pixels.
36. A printer according to any one of Claims 33 to 35, further comprising a store adapted to hold a measured print efficiency for each super pixel and wherein said distribution function includes the measured print efficiency.
37. A printer according to any one of Claims 33 to 36, wherein the super pixels are formed by ink jet printing.

1/5

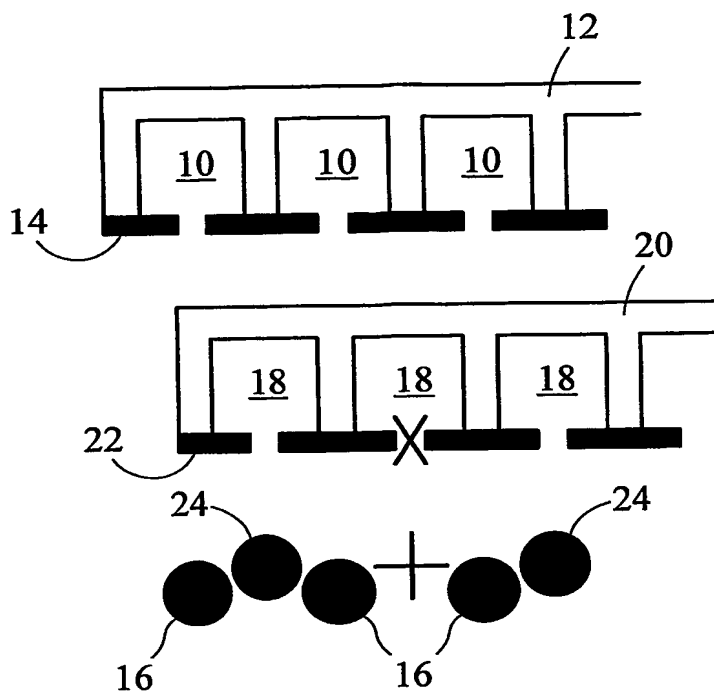


*Fig. 1*  
*Prior Art*

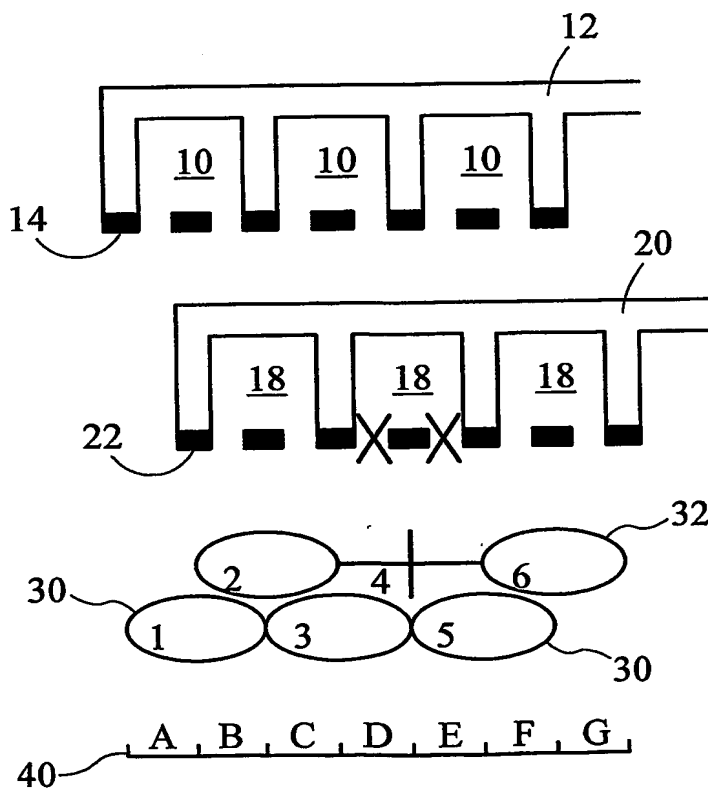



*Fig. 5*

*Fig. 2*

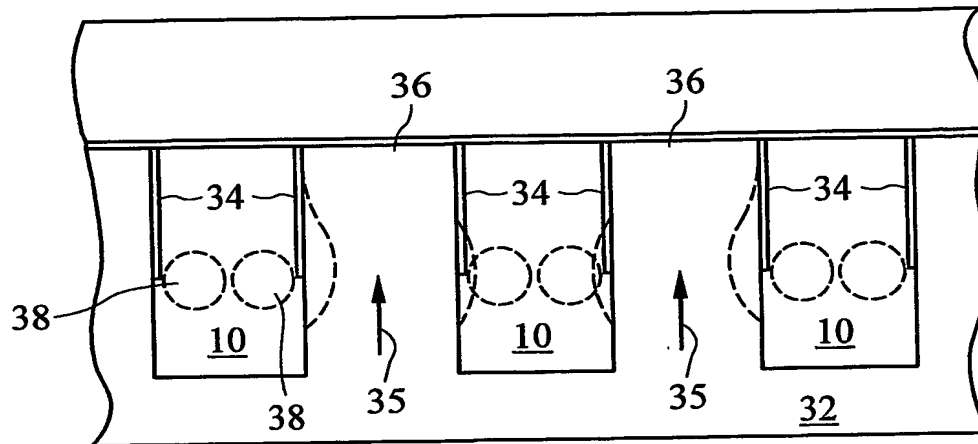



*Fig. 3*

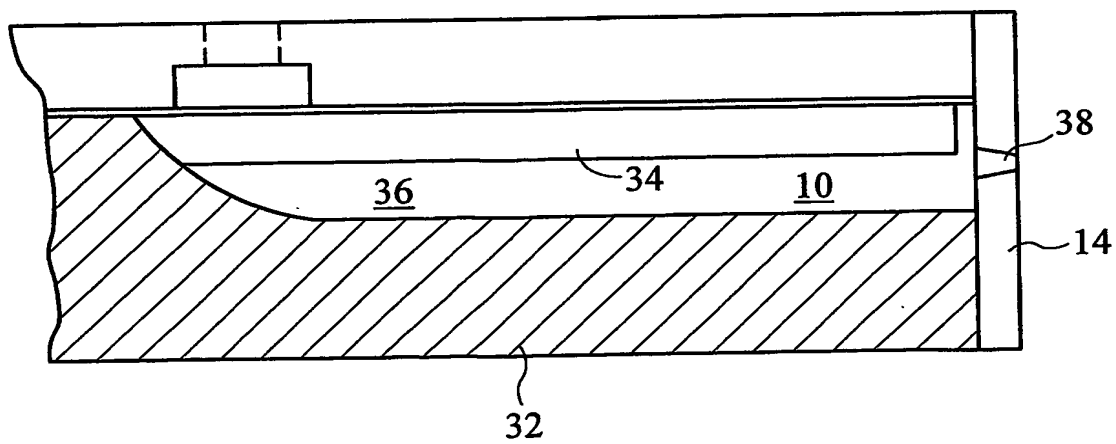

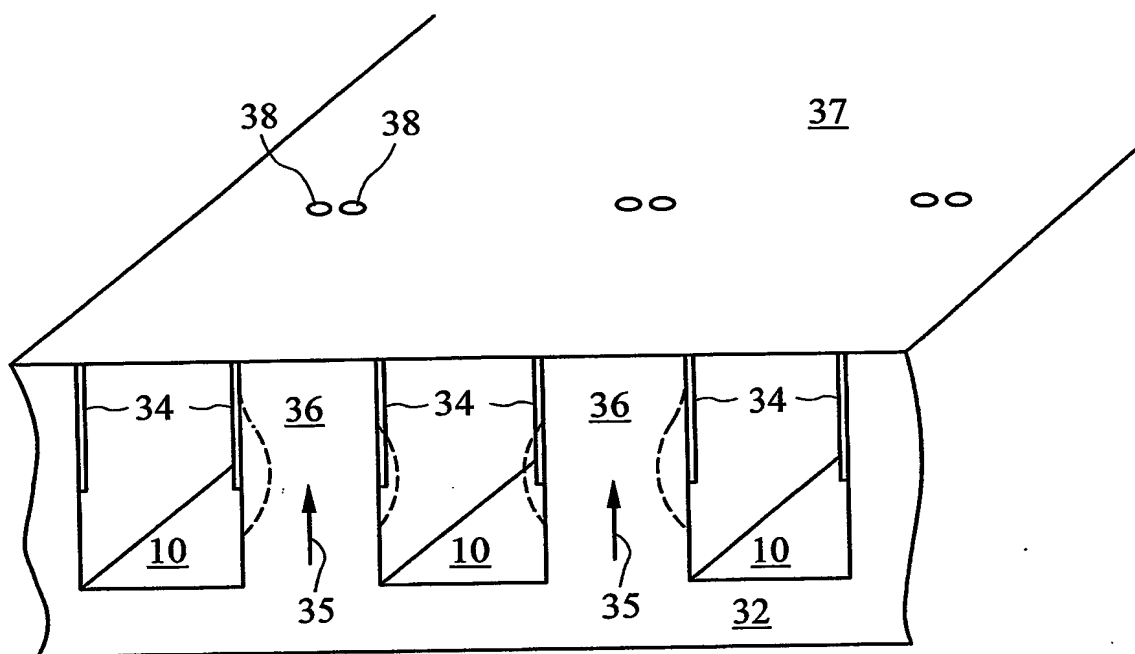

*Fig. 4*

4/5

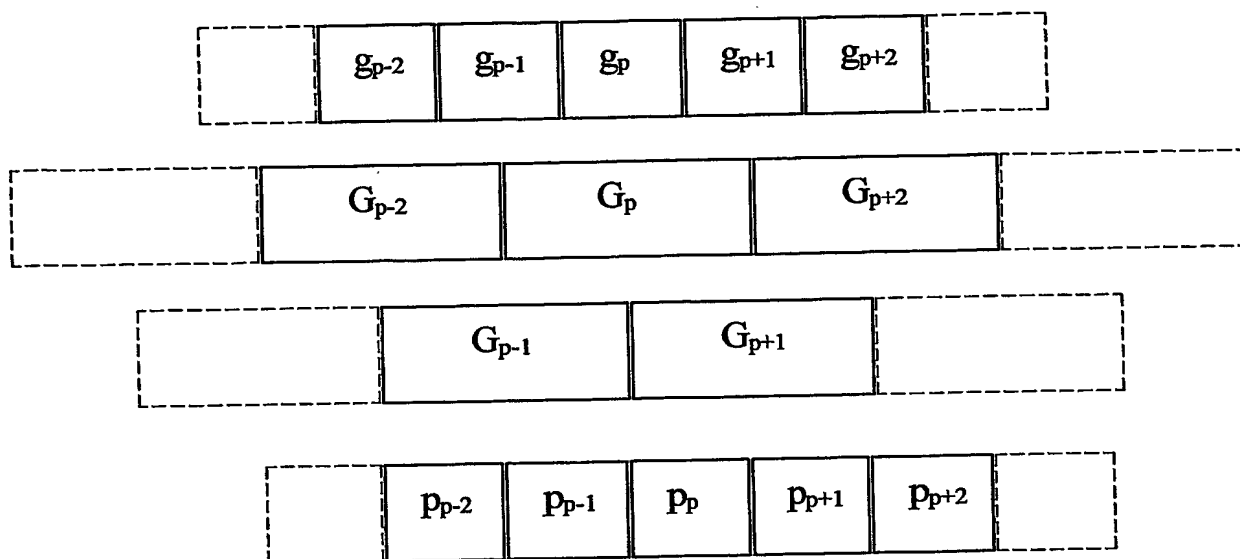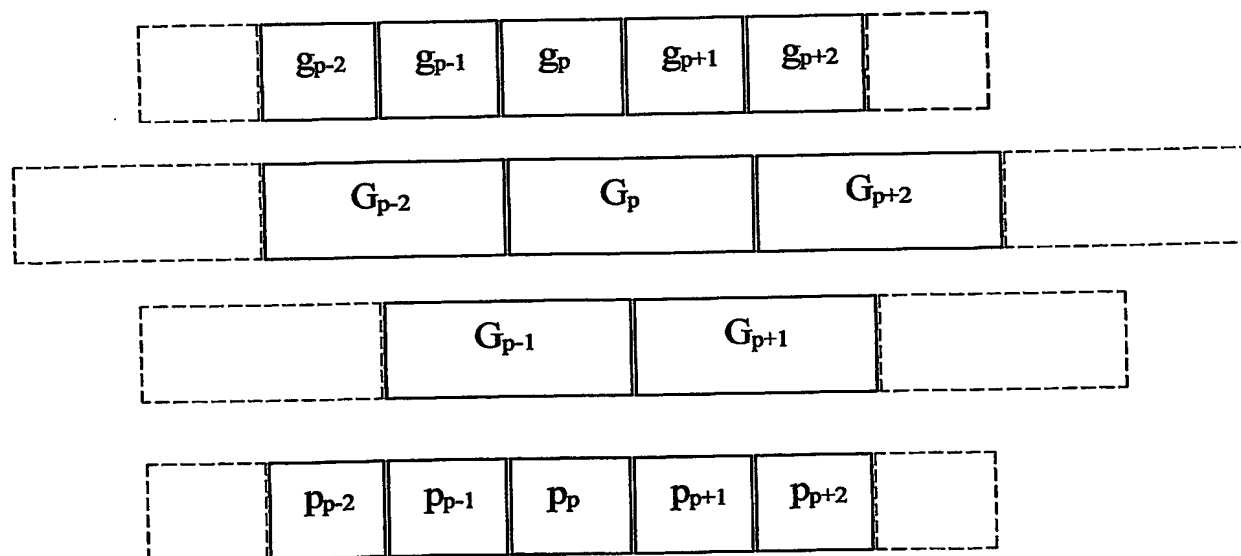*Fig. 6**Fig. 7*

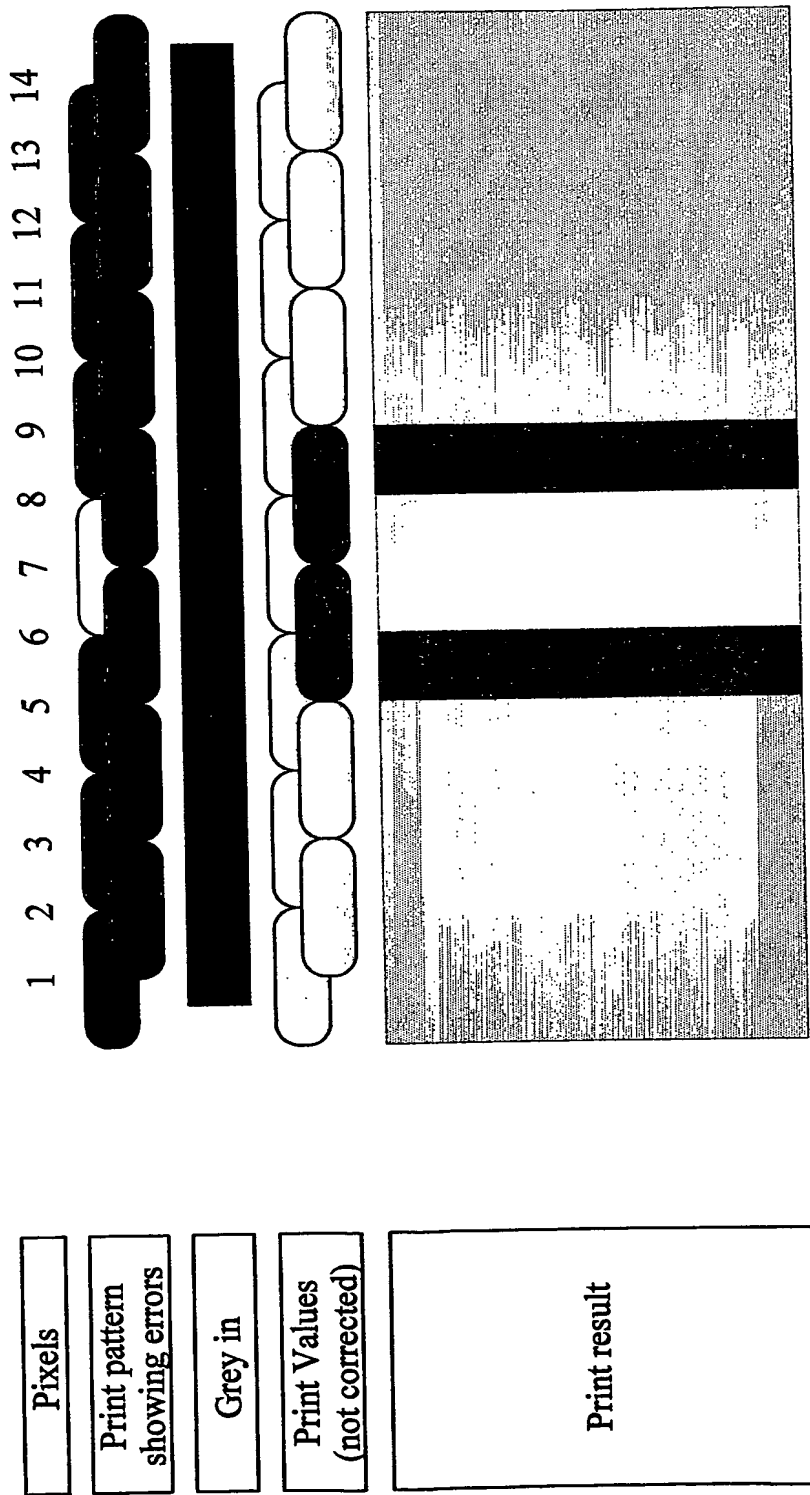


Fig. 8

# INTERNATIONAL SEARCH REPORT

Inter nal Application No  
PC 1/G B 03/03767

A. CLASSIFICATION OF SUBJECT MATTER  
IPC 7 G06K15/10 B41J2/05 B41J2/14

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)  
IPC 7 G06K B41J

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

WPI Data, PAJ, EPO-Internal

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 4 611 219 A (IKEDA MASAMI ET AL) 9 September 1986 (1986-09-09) the whole document	1-37
A	EP 0 767 061 A (XEROX CORP) 9 April 1997 (1997-04-09) column 10, line 17 -column 11, line 47	1-37
A	US 6 354 694 B1 (DAVIS COLIN C ET AL) 12 March 2002 (2002-03-12) column 10, line 30 - line 40 column 11, line 33 -column 12, line 41	1
A	EP 0 881 082 A (XEROX CORP) 2 December 1998 (1998-12-02) column 11, line 52 -column 15, line 31	1

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

### \* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search

2 December 2003

Date of mailing of the international search report

10/12/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Gélébart, Y



## INTERNATIONAL SEARCH REPORT

Inter 1al Application No  
PCT/GB 03/03767

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 4611219	A	09-09-1986	JP 1711420 C	11-11-1992
			JP 3064311 B	04-10-1991
			JP 58116163 A	11-07-1983
			JP 58116164 A	11-07-1983
			JP 58116165 A	11-07-1983
			DE 3248087 A1	07-07-1983
			DE 3250105 C2	22-02-2001
			FR 2518901 A1	01-07-1983
			GB 2115748 A ,B	14-09-1983
			HK 8591 A	01-02-1991
			US 4905017 A	27-02-1990
EP 0767061	A	09-04-1997	US 5731827 A	24-03-1998
			DE 69617594 D1	17-01-2002
			DE 69617594 T2	02-05-2002
			EP 0767061 A2	09-04-1997
			JP 9123440 A	13-05-1997
US 6354694	B1	12-03-2002	US 6099108 A	08-08-2000
			EP 0863020 A2	09-09-1998
			US 6155670 A	05-12-2000
			US 6310639 B1	30-10-2001
			US 2001012032 A1	09-08-2001
EP 0881082	A	02-12-1998	EP 0881082 A2	02-12-1998
			JP 10329317 A	15-12-1998

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☒ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**